




OSSO FACTORY

ADAPTADORES
ROSCADOS BSP
CON DOBLE
ASIENTO DE
O-RING

BSP THREADED
ADAPTERS WITH
DOUBLE O-RING
SEAT

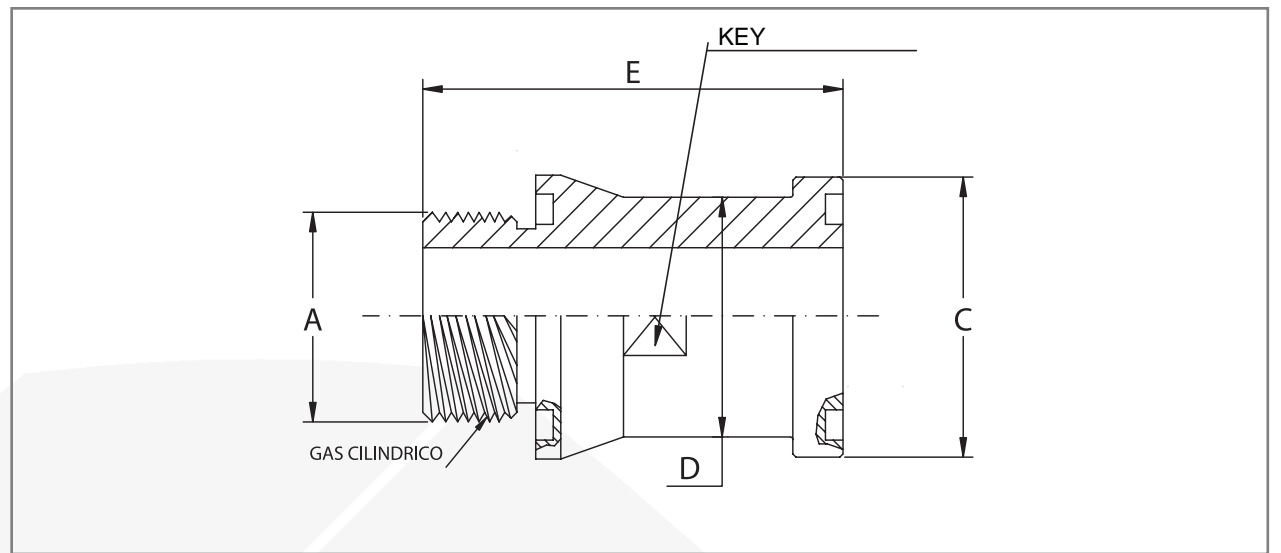

Presion maxima/ maximum pressure Kg/cm ²	Medida/Size	Tipo/Type	Dimensiones/ Dimensions				O-ring
			A	C	D	E	
SERIE 3000							
345	3/4"	BR-3000-RMBSP-1212	3/4"	38,1	32	53	2-214
345	1"	BR-3000-RMBSP-1616	1"	44,4	38	67	2-219
276	1"1/4	BR-3000-RMBSP-2020	1"1/4	50,8	43	64	2-222
207	1"1/2	BR-3000-RMBSP-2424	1"1/2	60,3	49	72	2-225
207	2"	BR-3000-RMBSP-3232	2"	71,4	61	74	2-228
SERIE 6000							
414	3/4"	BR-6000-RMBSP-1212	3/4"	41,3	32	60	2-214
414	1"	BR-6000-RMBSP-1616	1"	47,6	38	70	2-219
414	1"1/4	BR-6000-RMBSP-2020	1"1/4	54,0	44	75	2-222
414	1"1/2	BR-6000-RMBSP-2424	1"1/2	63,5	51	82	2-225
414	2"	BR-6000-RMBSP-3232	2"	79,4	67	94	2-228

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Adaptador cilíndrico BSP roscado con doble junta tórica BSP cylindrical adapter threaded with double o-ring seat	BR..	IBR..