




OSO FACTORY

BRIDAS CIEGAS  
CETOP  
BLIND CETOP  
FLANGES

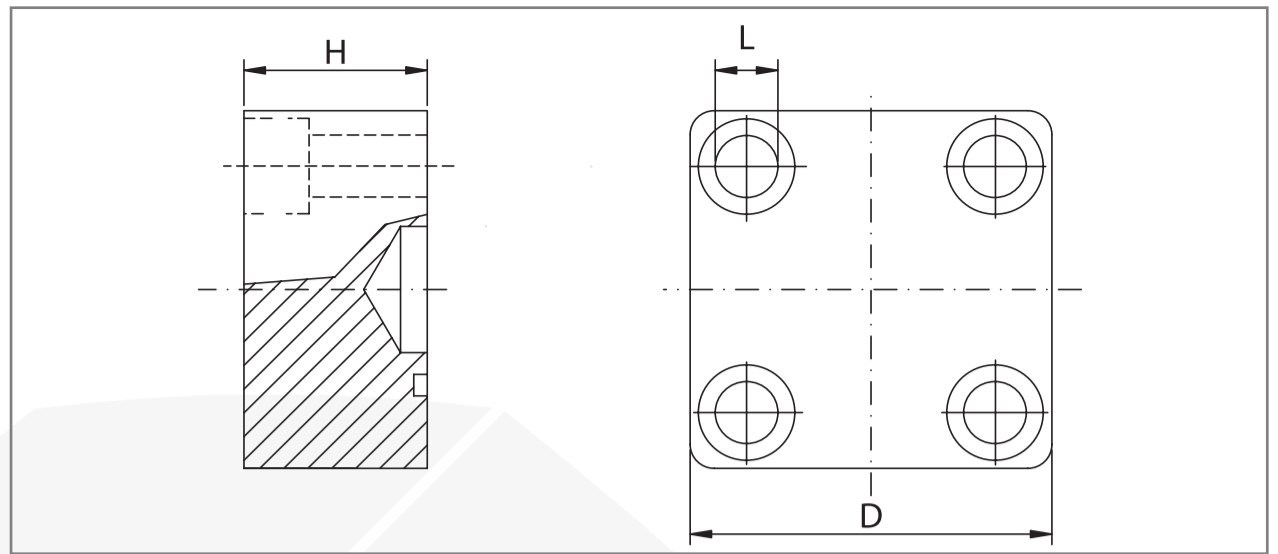

Presion maxima/ maximum pressure Kg/cm <sup>2</sup>	Medida/Size	Tipo/Type	Dimensiones/ Dimensions			Tornillo/Screws (L)	O-ring
			D	H	-	Metrico/Metric	
<b>SERIE 250</b>							
250	3/4"	BLBCT-250-12	50	32	-	M8x45	2-214
250	1"	BLBCT-250-16	65	35	-	M10x50	2-219
250	1"1/4	BLBCT-250-20	75	38	-	M12x55	2-222
250	1"1/2	BLBCT-250-24	85	42	-	M14x65	2-225
250	2"	BLBCT-250-32	100	44	-	M16x70	2-228
250	2"1/2	BLBCT-250-40	120	55	-	M20x70	2-232
250	3"	BLBCT-250-48	140	60	-	M20x70	2-237
250	4"		160	60	-	M24x80	2-254
<b>SERIE 400</b>							
400	3/4"	BLBCT-400-12	50	32	-	M8x45	2-214
400	1"	BLBCT-400-16	65	35	-	M10x50	2-219
400	1"1/4	BLBCT-400-20	75	38	-	M12x55	2-222
400	1"1/2	BLBCT-400-24	85	42	-	M14x65	2-225
400	2"	BLBCT-400-32	100	44	-	M16x70	2-228
400	2"1/2	BLBCT-400-40	120	55	-	M20x70	2-232
400	3"	BLBCT-400-48	140	60	-	M20x70	2-237
400	4"	BLBCT-400-64	160	60	-	M24x80	2-254

DESIGNACIÓN POR PEDIDO  
DESIGNATION FOR ORDER

Solo brida  
Only flange

MATERIAL

1045/1020

AISI 316L

BLBCT..

IBLBCT..