




OSSO FACTORY

CONTRABRIDAS
SOLDABLES -
TUBO METRICO
(LIGERO)

METRIC PIPE
CYLINDRIC ON
COUNTER -
FLANGES

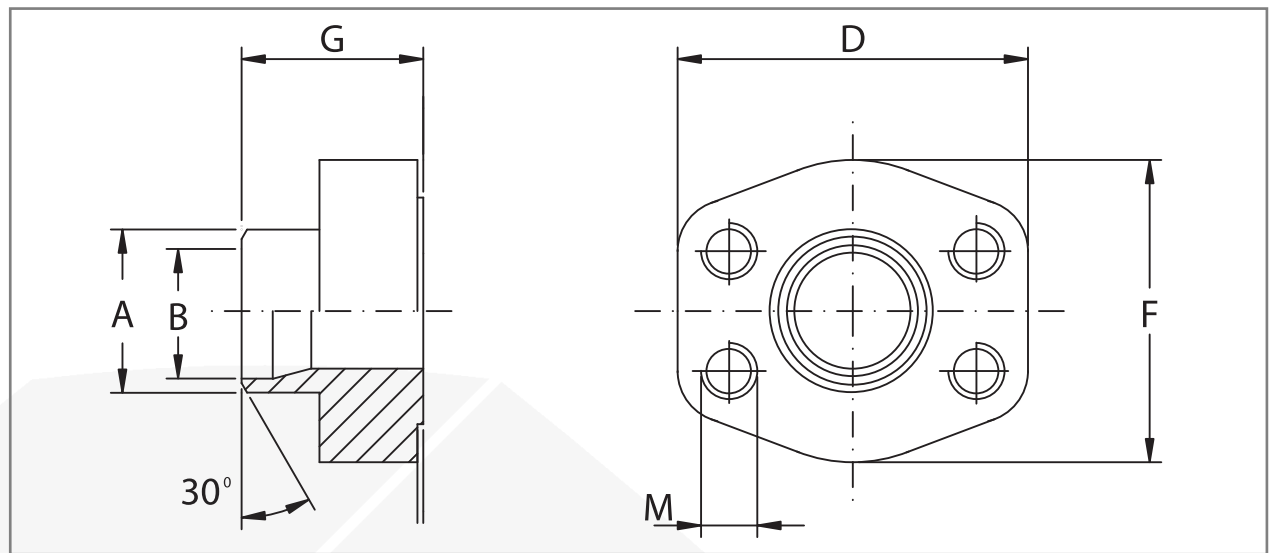

Presion maxima/ maximum pressure Kg/cm ²	Medida/Size	Tipo/Type	Dimensiones/ Dimensions							
			A	B	D	F	G	M		
SERIE 3000									Metrico/Metric	UNC
345	3/4"	BLC-3000-WN-1228M	28	21,5	65	50	36	M10	3/8"	
345	1"	BLC-3000-WN-1228M	35	27	70	55	38	M10	3/8"	
276	1"1/4	BLC-3000-WN-2043M	43	36	79	68	41	M10	7/16"	
207	1"1/2	BLC-3000-WN-2449M	49	42	93	78	44,5	M12	1/2"	
207	2"	BLC-3000-WN-3261M	61	53	102	90	45	M12	1/2"	
172	2"1/2	BLC-3000-WN-4077M	77	70	114	105	50	M12	1/2"	
138	3"	BLC-3000-WN-4890M	90	82	134	124	51	M16	5/8"	
34	4"	BLC-3000-WN-64115M	115	107	162	146	48	M16	5/8"	
SERIE 6000									M16	5/16"
414	1"1/2	BLC-6000-WN-2461M	61	40	112	94	56	M16	5/16"	

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Contrabrida con orificios de fijación roscados métricos Counter-flange with metric threaded fixing holes	MBLC..M	MIBLC..M
Contra brida con agujeros de fijación roscados unc Counter-flange with unc threaded fixing holes	UBLC..M	UIBLC..M