




OSSO FACTORY

ADAPTADORES  
ROSCADO  
METRICO  
DIN 3901 - 3902

DIN 3901 - 3902  
METRIC  
THREADED  
ADAPTERS

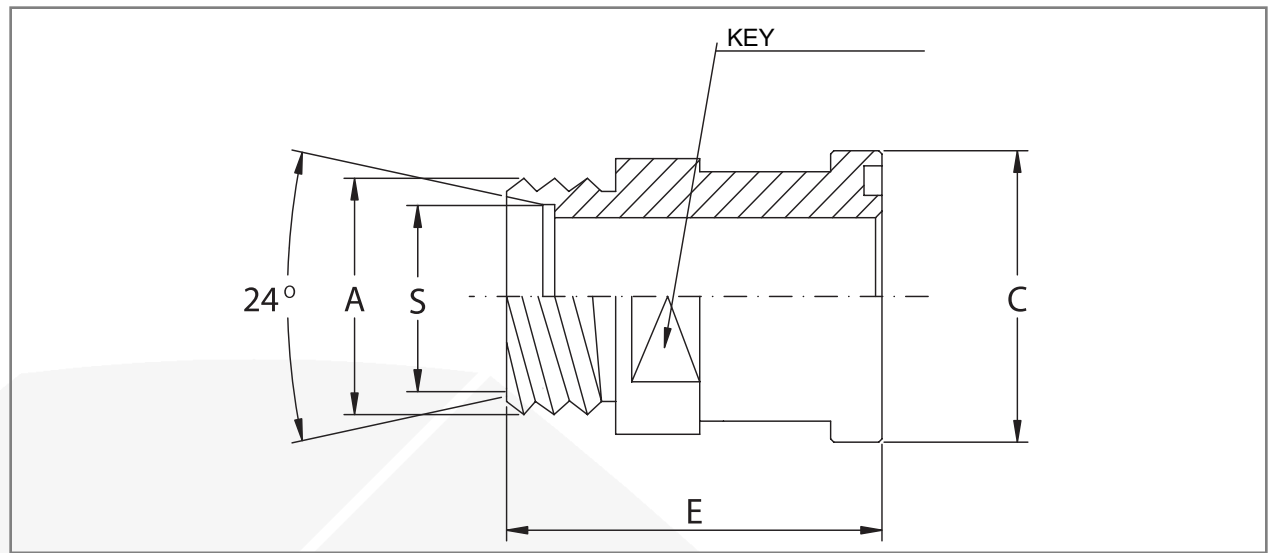

Presion maxima/ maximum pressure Kg/cm <sup>2</sup>	Medida/Size	Tipo/Type	Dimensiones/ Dimensions				O-ring
			A	C	E	S	
<b>SERIE 3000</b>							
315	3/4"	BR-3000-RMMT-12T18	M26x1,5	38,1	53	18	2-214
160	3/4"	BR-3000-RMMT-12T22	M30x2	38,1	53	22	2-214
350	3/4"	BR-3000-RMMT-12T20	M30x2	38,1	57	20	2-214
350	3/4"	BR-3000-RMMT-12T25	M36x2	38,1	57	25	2-214
160	1"	BR-3000-RMMT-16T28	M36x2	44,4	54	28	2-219
350	1"	BR-3000-RMMT-16T25	M36x2	44,4	58	25	2-219
350	1"	BR-3000-RMMT-16T30	M42x2	44,4	63	30	2-219
160	1"1/4	BR-3000-RMMT-20T28	M36x2	50,8	58	28	2-222
160	1"1/4	BR-3000-RMMT-20T35	M45x2	50,8	58	35	2-222
280	1"1/4	BR-3000-RMMT-20T25	M36x2	50,8	60	25	2-222
280	1"1/4	BR-3000-RMMT-20T30	M42x2	50,8	62	30	2-222
280	1"1/4	BR-3000-RMMT-20T38	M52x2	50,8	66	38	2-222
160	1"1/2	BR-3000-RMMT-24T42	M52x2	60,3	64	42	2-225
210	1"1/2	BR-3000-RMMT-24T38	M52x2	60,3	70	38	2-225
<b>SERIE 6000</b>							
400	3/4"	BR-6000-RMMT-12T16	M24x1,5	41,3	59	16	2-214
400	3/4"	BR-6000-RMMT-12T20	M30x2	41,3	61	20	2-214
400	3/4"	BR-6000-RMMT-12T25	M36x2	41,3	63	25	2-214
400	3/4"	BR-6000-RMMT-12T30	M42x2	41,3	64	30	2-214
400	1"	BR-6000-RMMT-16T25	M36x2	47,6	72	25	2-219
400	1"	BR-6000-RMMT-16T30	M42x2	47,6	74	30	2-219
400	1"1/4	BR-6000-RMMT-20T30	M42x2	54,0	79	30	2-222
400	1"1/4	BR-6000-RMMT-20T38	M52x2	54,0	83	38	2-222
400	1"1/2	BR-6000-RMMT-24T38	M52x2	63,5	89	38	2-225

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Adaptador con ranura para junta tórica Adapter with o-ring groove	CBR..	CIBR..