




OSSO FACTORY

BRIDAS
SOLDABLES -
TUBO METRICO
(LIGERO)

METRIC PIPE
CYLINDRIC ON
FLANGES

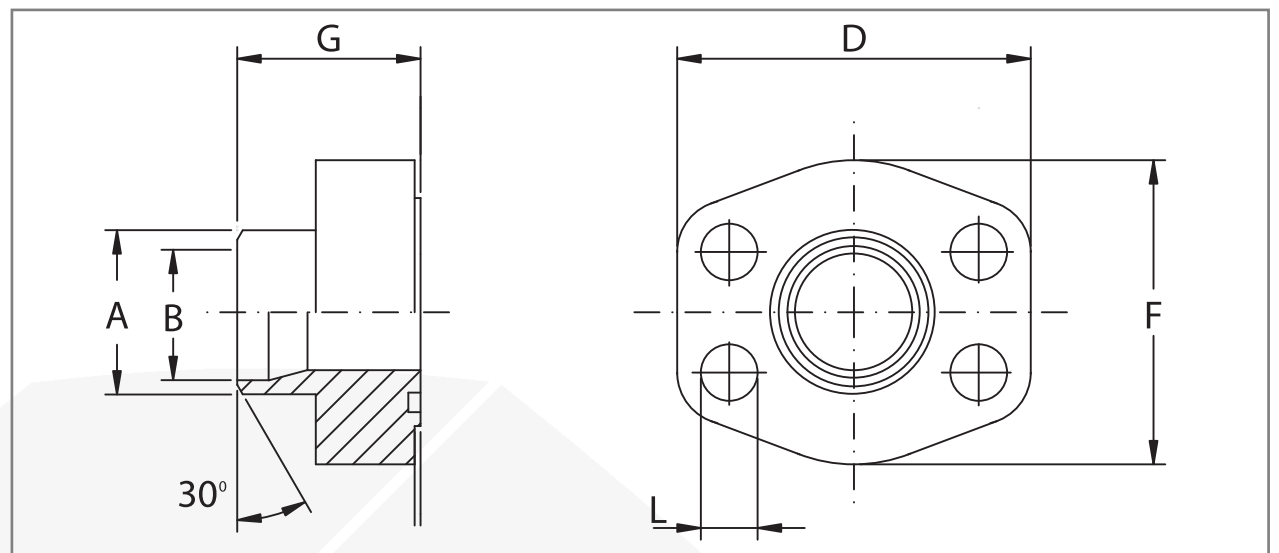

Presion maxima/ maximum pressure Kg/cm ²	Medida/Size	Tipo/Type	Dimensiones/ Dimensions					Tornillo/Screws (L)		O-ring
			A	B	D	F	G	Metrico/Metric	UNC	
SERIE 3000										
345	3/4"	BLB-3000-WN-1228M	28	21,5	65	50	36	M10x35	3/8"x1"1/2	2-214
345	1"	BLB-3000-WN-1635M	35	27	70	55	38	M10x35	3/8"x1"1/2	2-219
276	1"1/4	BLB-3000-WN-2043M	43	36	79	68	41	M10x40	7/16"x1"3/4	2-222
207	1"1/2	BLB-3000-WN-2449M	49	42	93	78	44,5	M12x45	1/2"x1"3/4	2-225
207	2"	BLB-3000-WN-3261M	61	53	102	90	45	M12x45	1/2"x1"3/4	2-228
172	2"1/2	BLB-3000-WN-4077M	77	70	114	105	50	M12x45	1/2"x1"3/4	2-232
138	3"	BLB-3000-WN-4890M	90	82	134	124	51	M16x50	5/8"x2"	2-237
34	4"	BLB-3000-WN-64115M	115	107	162	146	48	M16x50	5/8"x2"	2-254
SERIE 6000										
414	1"1/2	BLB-6000-WN-2461M	61	131	112	94	56	M16x55	5/8"x2"1/4	2-225

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Solo brida Only flange	BLB..M	IBLB..M
Brida completa de tornillos métricos, arandelas y junta tórica Flange complete of metric screws, grower type washers and o-ring	MBLB..M	MIBLB..M
Brida completa de tornillos unc, arandelas y junta tórica Flange complete of unc screws, grower type washers and o-ring	UBLB..M	UIBLB..M