




OSSO FACTORY

BRIDAS  
ROSCADAS BSP  
ASIENTO  
CONICO 60°

60° TAPERED  
SEAT BSP  
THREADED  
FLANGES

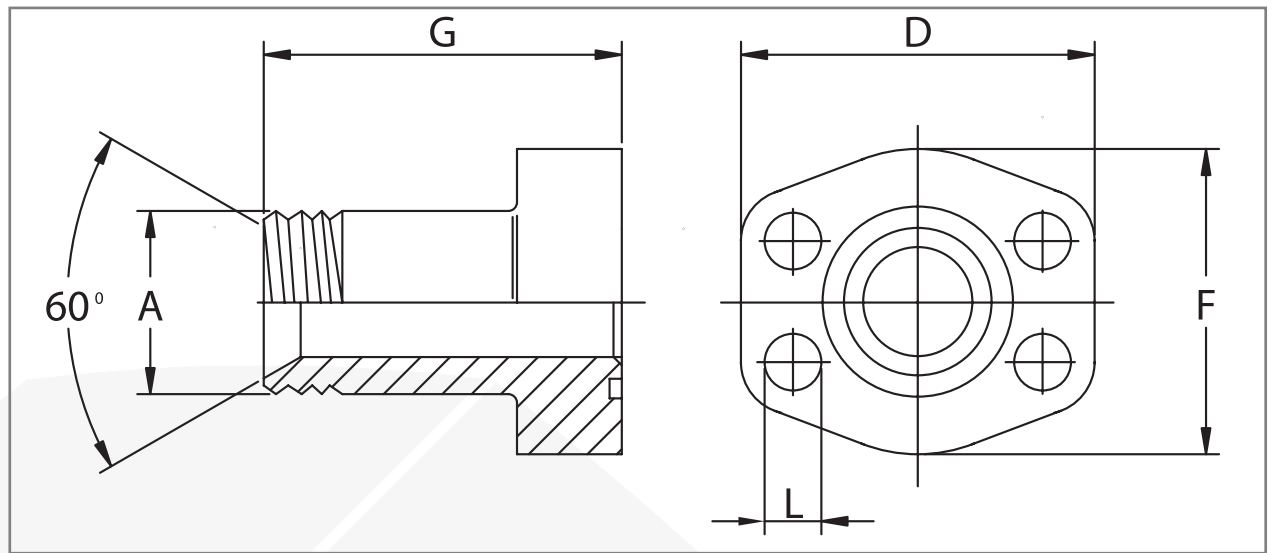

Presion maxima/ maximum pressure Kg/cm <sup>2</sup>	Medida/Size	Tipo/Type	Dimensiones/ Dimensions				Tornillo/Screws (L)		O-ring
			A	D	F	G	Metrico/Metric	UNC	
<b>SERIE 3000</b>									
345	3/4"	BLB-3000-RMBSP-1212	3/4" GAS	65	50	60	M10x35	3/8"x1"1/2	2-214
345	3/4"	BLB-3000-RMBSP-1208	1/2" GAS	65	50	60	M10x35	3/8"x1"1/2	2-214
345	1"	BLB-3000-RMBSP-1616	1" GAS	70	55	63	M10x35	3/8"x1"1/2	2-219
345	1"	BLB-3000-RMBSP-1612	3/4" GAS	70	55	63	M10x40	3/8"x1"1/2	2-219
276	1"1/4	BLB-3000-RMBSP-2020	1"1/4 GAS	79	68	65	M10x35	7/16"x1"3/4	2-222
276	1"1/4	BLB-3000-RMBSP-2016	1" GAS	79	68	65	M10x35	7/16"x1"3/4	2-222
207	1"1/2	BLB-3000-RMBSP-2424	1"1/2 GAS	94	78	70	M12x35	1/2"x1"3/4	2-225
207	1"1/2	BLB-3000-RMBSP-2420	1"1/4 GAS	94	78	70	M12x35	1/2"x1"3/4	2-225
<b>SERIE 6000</b>									
414	3/4"	BLB-6000-RMBSP-1212	3/4" GAS	71	60	73	M10x40	3/8"x1"1/2	2-214
414	3/4"	BLB-6000-RMBSP-1208	1/2" GAS	71	60	73	M10x40	3/8"x1"1/3	2-214
414	1"	BLB-6000-RMBSP-1616	1" GAS	81	70	82	M12x45	7/16"x1"3/4	2-219
414	1"	BLB-6000-RMBSP-1612	3/4" GAS	81	70	82	M12x45	7/16"x1"3/5	2-219
414	1"1/4	BLB-6000-RMBSP-2020	1"1/4 GAS	95	78	92	M14x45	-	2-222
414	1"1/4	BLB-6000-RMBSP-2016	1" GAS	95	78	92	M14x45	-	2-222
414	1"1/2	BLB-6000-RMBSP-2424	1"1/2 GAS	113	95	96	M16x55	5/8"x2"1/4	2-225
414	1"1/2	BLB-6000-RMBSP-2420	1"1/4 GAS	113	95	96	M16x55	5/8"x2"1/4	2-225

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Solo brida Only flange	BLB..	IBLB..
Brida completa de tornillos métricos, arandelas y junta tórica Flange complete of metric screws, grower type washers and o-ring	MBLB..	MIBLB..
Brida completa de tornillos unc, arandelas y junta tórica Flange complete of unc screws, grower type washers and o-ring	UBLB..	UIBLB..