




OSSO FACTORY

BRIDAS
ROSCADAS
UNF CON
O-RING

THREADED
FLANGES UNF
WITH O-RING

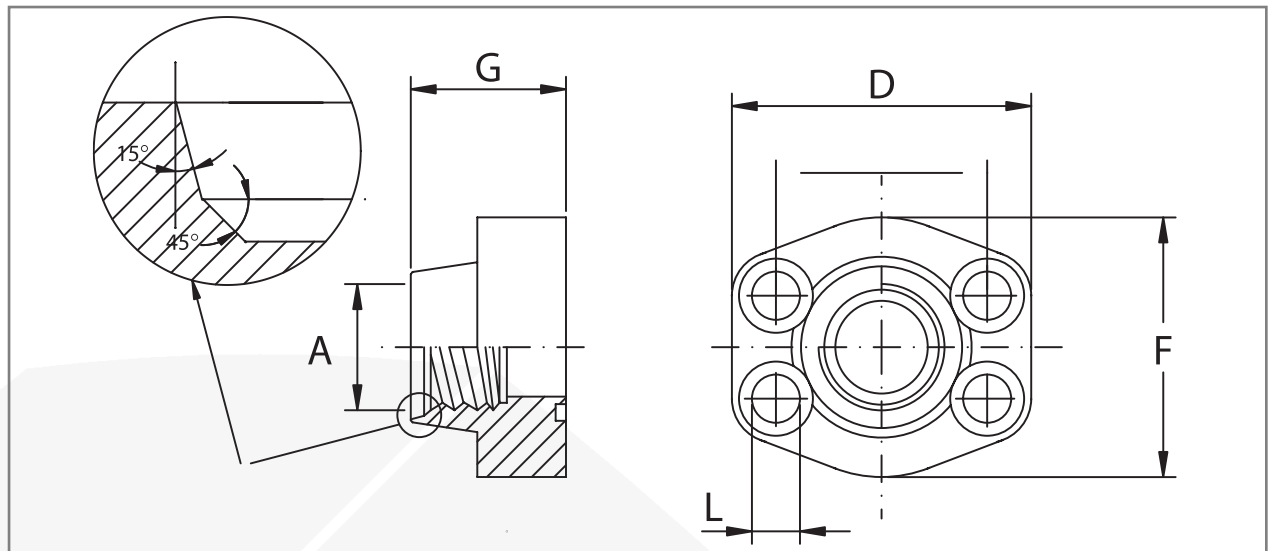

Presion maxima/ maximum pressure Kg/cm ²	Medida/Size	Tipo/Type	Dimensiones/ Dimensions				Tornillo/Screws (L)		O-ring
			A	D	F	G	Metrico/Metric	UNC	
SERIE 3000									
345	3/4"	BLB-3000-RHBOSS-1212	1"1/16 - 12UN	65	50	36	M10x35	3/8"x1"1/2	2-214
345	1"	BLB-3000-RHBOSS-1616	1"5/16 - 12UN	70	55	38	M10x35	3/8"x1"1/2	2-219
276	1"1/4	BLB-3000-RHBOSS-2020	1"5/8 - 12UN	79	68	41	M10x40	7/16"x1"3/4	2-222
207	1"1/2	BLB-3000-RHBOSS-2424	1"7/8 - 12UN	93	78	45	M12x45	1/2"x1"3/4	2-225
SERIE 6000									
414	3/4"	BLB-6000-RHBOSS-1212	1"1/16 - 12UN	71	55	35	M10x40	3/8"x1"1/2	2-214
414	1"	BLB-6000-RHBOSS-1616	1"5/16 - 12UN	81	65	42	M12x45	7/16"x1"3/4	2-219
414	1"1/4	BLB-6000-RHBOSS-2020	1"5/8 - 12UN	95	78	45	M14x45	-	2-222
414	1"1/2	BLB-6000-RHBOSS-2424	1"7/8 - 12UN	112	94	50	M16x55	5/8"x2"1/4	2-225

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Solo brida Only flange	BLB..	IBLB..
Brida completa de tornillos métricos, arandelas y junta tórica Flange complete of metric screws, grower type washers and o-ring	MBLB..	MIBLB..
Brida completa de tornillos unc, arandelas y junta tórica Flange complete of unc screws, grower type washers and o-ring	UBLB..	UIBLB..