




OSSO FACTORY

BRIDAS
SOLDABLES -
TUBO METRICO
(PESADO)

METRIC PIPE
CYLINDRIC
ON FLANGES

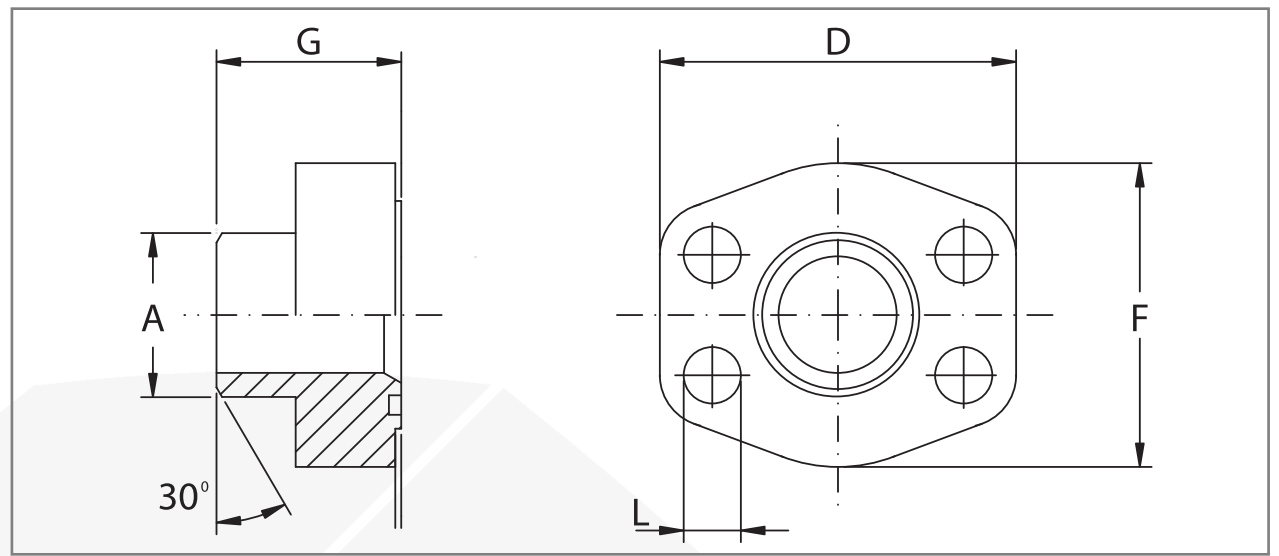

Presion maxima/ maximum pressure Kg/cm ²	Medida/Size	Tipo/Type	Dimensiones/ Dimensions				Tornillo/Screws (L)		O-ring
			A	D	F	G	Metrico/Metric	UNC	
SERIE 3000									
345	3/4"	BLB-3000-WN-1225M	25	65	50	36	M10x35	3/8"x1"1/2	2-214
345	1"	BLB-3000-WN-1630M	30	70	55	38	M10x35	3/8"x1"1/2	2-219
276	1"1/4	BLB-3000-WN-2038M	38	79	68	41	M10x40	7/16"x1"3/4	2-222
207	1"1/2	BLB-3000-WN-2442M	42	93	78	44,5	M12x45	1/2"x1"3/4	2-225
207	1"1/2	BLB-3000-WN-2449M	49	93	78	44,5	M12x45	1/2"x1"3/4	2-225
207	2"	BLB-3000-WN-3249M	49	102	90	45	M12x45	1/2"x1"3/4	2-228
207	2"	BLB-3000-WN-3261M	61	102	90	45	M12x45	1/2"x1"3/4	2-228
172	2"1/2	BLB-3000-WN-4077M	77	114	105	50	M12x45	1/2"x1"3/4	2-232
138	3"	BLB-3000-WN-4877M	77	134	124	51	M16x50	5/8"x2"	2-237
34	3"1/2	BLB-3000-WN-5677M	77	152	136	48	M16x50	5/8"x2"	2-241
34	3"1/2	BLB-3000-WN-5690M	90	152	136	48	M16x50	5/8"x2"	2-241
34	4"	BLB-3000-WN-6477M	77	162	146	48	M16x50	5/8"x2"	2-254
34	4"	BLB-3000-WN-6490M	90	162	146	48	M16x50	5/8"x2"	2-254
SERIE 6000									
414	3/4"	BLB-6000-WN-2449M	20	71	55	35	M10x40	3/8"x1"1/2	2-214
414	3/4"	BLB-6000-WN-1225M	25	71	55	35	M10x40	3/8"x1"1/2	2-214
414	1"	BLB-6000-WN-1625M	25	81	65	42	M12x45	7/16"x1"3/4	2-219
414	1"	BLB-6000-WN-1630M	30	81	65	42	M12x45	7/16"x1"3/4	2-219
414	1"1/4	BLB-6000-WN-2038M	38	95	78	44	M14x45	-	2-222
414	1"1/2	BLB-6000-WN-2438M	38	112	94	56	M16x55	5/8"x2"1/4	2-225
414	1"1/2	BLB-6000-WN-2448M	48,6	112	94	56	M16x55	5/8"x2"1/4	2-225
414	2"	BLB-6000-WN-3261M	61	134	114	65	M20x70	3/4"x2"3/4	2-228

DESIGNACIÓN POR PEDIDO DESIGNATION FOR ORDER	MATERIAL	
	1045/1020	AISI 316L
Solo brida Only flange	BLB..M	IBLB..M
Brida completa de tornillos métricos, arandelas y junta tórica Flange complete of metric screws, grower type washers and o-ring	MBLB..M	MIBLB..M
Brida completa de tornillos unc, arandelas y junta tórica Flange complete of unc screws, grower type washers and o-ring	UBLB..M	UIBLB..M